


# CUSTOMER DRAWING ONLY

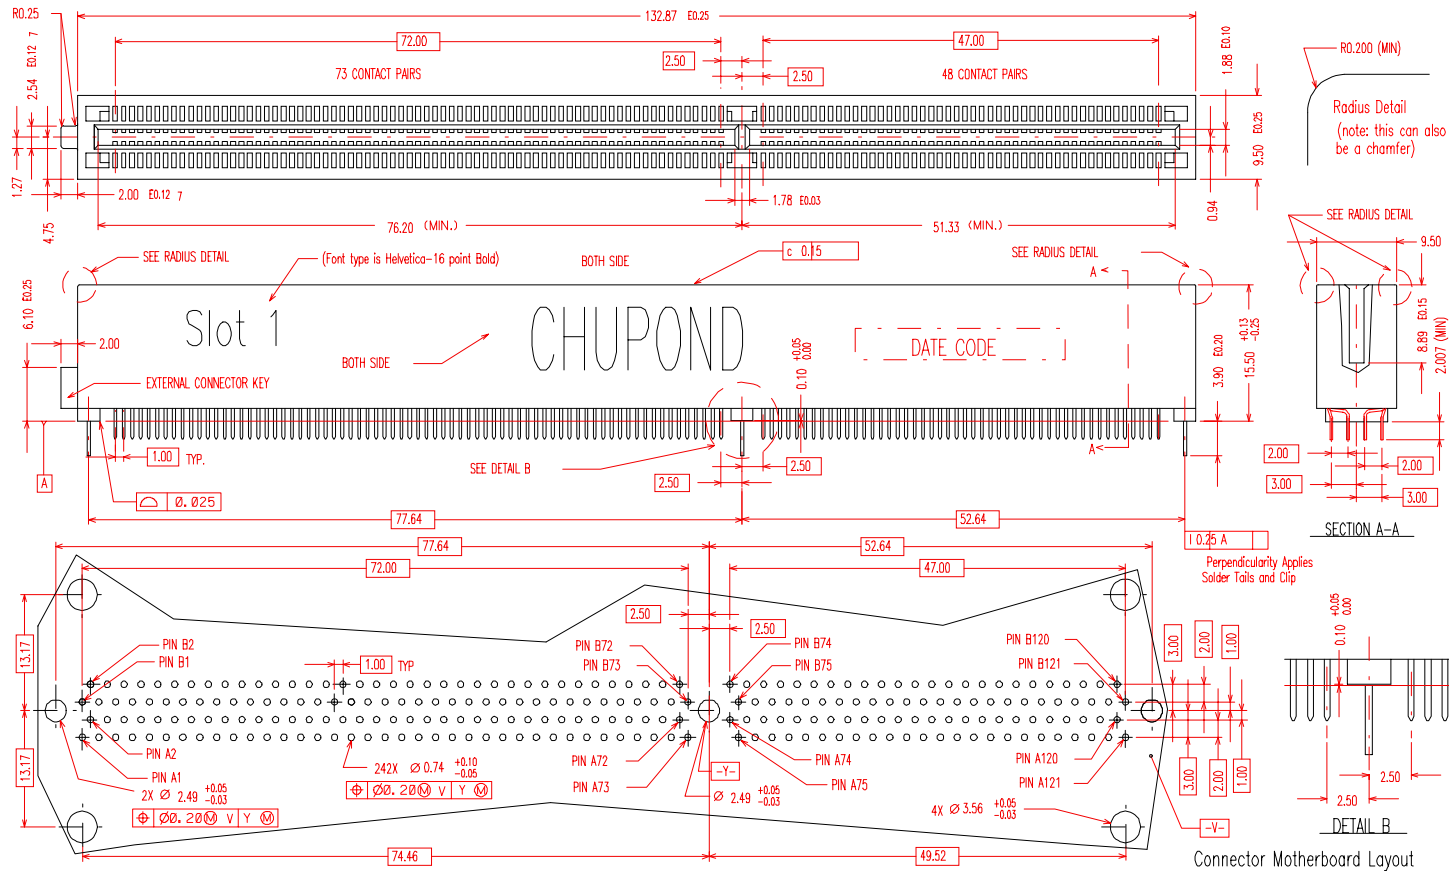

<b>Drawn By:</b> LJ, H	<b>Checked By:</b> H.H.	<b>Contact:</b> Phosphor Bronze, plated 2μ"Au over 15μ"PdNi over 50μ"Ni <b>Soldertail:</b> plated 100μ" SnPb over 50μ"Ni <b>Housing:</b> Glass-filled PCT, color brown, UL94V-0
<b>Drawn:</b> 5/23/97	<b>Scale:</b> None	<b>Contact Resistance:</b> 30milliohms max; <b>Current Rating:</b> 0.5 A per contact <b>Dielectric Withstanding Voltage:</b> 500VAC Min <b>Insulation Resistance:</b> 100 megohms min; <b>Operating Temp:</b> -55°C to+125°C <b>Insertion per Contact/pair:</b> 94g max; <b>Withdrawl per Contact/pair:</b> 56 g max
<b>Released:</b> 7/25/97	<b>Sheet 1 of 1</b>	<b>Tolerances:</b> +/- .25mm +/- 3°

**CAI** Chupond America, Inc.  
 6168 Greenhill Rd., New Hope, PA 18938-9630 USA

**TITLE: Slot 1 for Pentium II**

**ENG. #: 0206-242-02-C** Rev.